
This drawing, specifications, and concepts contained here in are the sole property of Dart Aerospace, and may not be reproduced or used in any fashion without the
Dart Aerospace, and may not be reproduced or used in any fashion without the
prior written permission of Dart Aerospace Fugene OR

TAG	X LOC	YLOC	SIZE		
A1	534	-6.195			
A2	192	-7.022	10-32 UNF - 2B THRU ALL		
A3	192	-5.367			
A4	.636	-7.365			
A5	.636	-5.025			
A6	1.463	-7.022			
A7	1.463	-5.367			
A8	1.806	-6.195			
B1	490	-3.816	Ø .177 THRU ALL + 0000		
B2	8.026	-1.265	∟		
C1	.000	.000	Ø .500 ⁺ .005 THRU ALL		
C2	7.625	.000	Φ .500 ₀₀₀ THRU ALL		
			Ø 1.0000 ^{+.0005} THRU ALL		
D1	.636	-6.195			
			□ Ø 1.125 ▼ .520 ^{+.003}		
E1	.909	-4.107			
E2	3.813	-4.107	Ø .3125 ^{+.0050} THRU ALL		
E3	4.454	.219	\$.51250000 HING ALL		
E4	7.777	-4.107			
F1	1.525	-1.208	4-40 UNC - 2B ▼ .712		
F2	1.899	-2.082	1 10 0110 25 \$ 1112		
G1	1.740	-2.250	Ø 012 ∓ 270		
G2	1.740	.250	ϕ .213 $\sqrt{\ }$.370 1/4-28 UNF - 2B $\sqrt{\ }$.334 FAR SIDE		
G3	5.490	-2.250			
H1	2.173	-2.361	Ø .250 THRU ALL		
JI	2.830	862	$∅$.8754 THRU ALL .8751 THRU $Φ$ 1.000 $Φ$.470 $^{+.003}_{000}$		
K1	2.830	.013	Ø .500 THRU ALL		
K2	2.830	-1.737	✓ Ø .570 X 82°		
L1	2.830	-2.150	Ø .129		
M1	3.478	986	Ø .2522		
N1	6.185	-3.868	ϕ .6250 $^{+.0005}_{0000}$ THRU ALL ϕ .750 $\overline{\psi}$.470 $^{+.003}_{000}$		
P1	7.613	-6.408	ϕ .6250 $^{+.0005}_{0000}$ THRU ALL L \downarrow 0.750 $\sqrt{}$.540 $^{+.003}_{000}$		
R1	4.217	960	Ø .850 ▼ .781 □ Ø 1.1243 ▼ .766+.003 1.1238 ▼ .766000		

		REVISIONS REVISIONS			
REV	ECR	DESCRIPTION	DATE	INITIAL	APPROVED
7		AS DRAWN BY CANAM.	11/1/2012	JAG	
8		CH'D HOLE TOLERENCES FOR HOLES B1 & B2,C1 & C2, E1, E2, & E3, J1, K1 & K2, L1, & R1	11/2/2012	JAG	
9	14-0123	CH'D TITLE BLOCK WAS RED BARN IS DART. ADDED MACHINE ENGRAVE NOTE, CH'D TOLERANCE ON NON-CRITICAL DIMENSIONS.	8/12/2014	DPD	RW
10	15-0223	UPDATED TO NEW DRAFTING STANDARDS. CH'D DIM WAS Ø.25052508 ▼.300 IS Ø.25132522 ▼.700. UPDATED HOLE TABLE WAS P1 IS N1, WAS P2 IS P1. CH'D ALL HOLE ▼ TO BE CALLED FROM SAME SURFACE; D1 WAS ▼.312 IS ▼.712, J1 WAS ▼.070 +.003000, IS ▼.470 +.003000, IS ▼.520 +.003000, IP WAS ▼.312 IS ▼.712, J1 WAS ▼.070 +.003000 IS ▼.470 +.003000, IP WAS ▼.72 IS ▼.6, M1 WAS ▼.300 IS ▼.700, N1 WAS ▼.070 +.003000, IP WAS ▼.070 +.003000, IS ▼.470 +.003000, IS ▼.470 +.003000, IS ▼.470 +.003000, IN WAS ▼.301 IS ▼.781, WAS ▼.366 +.003000 IS ▼.766 +.003000, ADDED HOLE ▼ NOTE. CH'D DIMS WAS .840 +.003000 IS .840 +.010000, WAS .540 +.000003 IS .540. ADDED DIM .473 +.010000. DELETED DIM .370 +.000003. DELETED UNNECESSARY DIMS SHEET 2.	8/24/2015	DPD	JAG

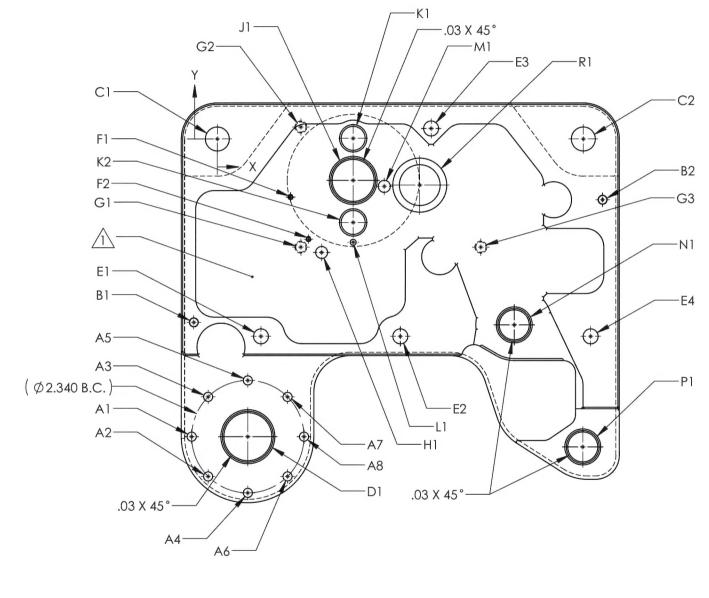

Description


C60-11-1 1 SIDE PLATE SOLENOID

Material

7075-T6

B/O INFORMATION OR SPECIFICATIONS

Part #

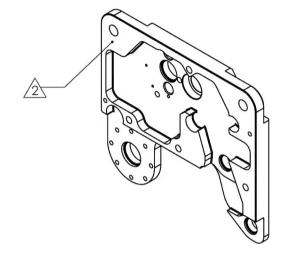

MACHINE ENGRAVE BATCH NUMBER. $/\widehat{2}\setminus$ HOLE $\overline{\lor}$ CALLED FROM THIS SURFACE.

SIDE PLATE SOLENOID

MAT'L 7075-T6		DRAW	1B	
UNLESS OT	APPROVE			
.XXX ± .005	FRACTIONS ± 1/8	HEAT TREAT		
.XX ± .01	ANGLES ±.5°	FINISH		
1. BREAK ALL SH	ARP EDGES .015 x 45°	SPEC	М	

CANAM BLACK ANODIZE MIL-A-8625F, TYPE II, CLASS II 1. BREAK ALL SHARP EDGES .015 x 45° OR .015R 2. DIMENSIONAL LIMITS APPLY AFTER PLATING USED ON MODEL SCALE DATE 4/11/2003 SHEET 1 OF 2

C60-11-1

